


MY10HW-1.2

贯通式接线端子

下载日期:2024-05-07

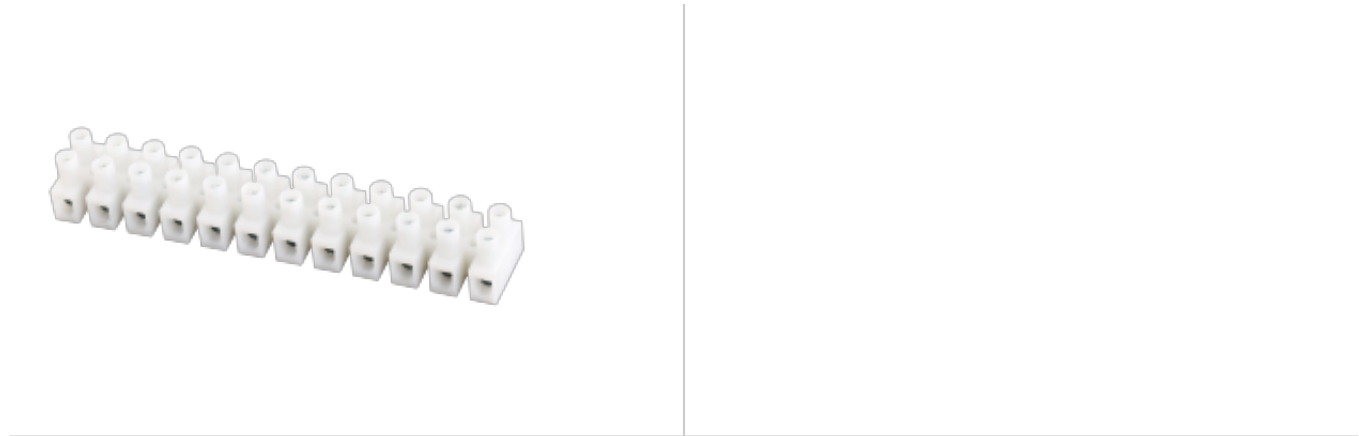

目录仅供参考，实际规格依产品工程图为准 版本1.0

材质及电镀 Material

塑件 Housing	PA66 , UL94V-2
螺丝 Screws	M3 , Steel , Zn plated
压线柱 Pressure line column	Copper alloy , Ni plated

电气性能 Electrical

参考标准 Standard	UL	IEC
额定电压 Rated voltage	300V	450V
额定电流 Rated current	30A	24A
使用线径 Wire range	20-10AWG	4.0mm ²
接触电阻 Contact Resistance	20mΩ	
绝缘电阻 Insulation resistance	500MΩ/DC500V	
耐电压 Withstanding voltage	AC1600V/1Min	
温度范围 Temp.range	-40℃~+105℃	
扭矩 Torque	0.5Nm/4.5Lb.in/5.1Kgf.cm	

尺寸图



MY10HW-1.2

贯通式接线端子

下载日期:2024-05-07

