

WJ15EDGKSH-3.5

插拔式接线端子

下载日期:2024-05-06



插拔式连接器

额定电流: 7 A

额定电压: 150 V

使用线径: 28-18 AWG

间距: 3.5 mm



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

等级 Use Group	B	C	D
额定电压 Rate Voltage [V]	150	-	150
额定电流 Rated Current [A]	7	-	7
接线范围 Wire Range [AWG]	28-18		
耐电压 Dielectric Voltage-Withstand	1.3KV		

技术参数-IEC

过电压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	80	160	200
额定电流 Rated Current [A]	10	10	10
额定冲击电压 Impulse withstand voltage [KV]	1.5	2.5	2.5
导线截面积[硬/柔] Conductor cross section [mm²]	0.2-1.0		

材料 Material

绝缘材料 Insulation Material	PA66
--------------------------	------

WJ15EDGKSH-3.5

插拔式接线端子

下载日期:2024-05-06




阻燃等级 Flame relardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数 Pitch/Poles [mm]/[P]	3.5/2*2-2*24
剥线长度 Stripping Length [mm]	7-8
螺丝/扭矩 Screw/Torque(Max)[N.m]	/
工作温度 Operating temperature [°C]	-40~+105
焊锡温度 Soldering temperature	/
引针尺寸 Pin dimensions [mm]	/
PCB板孔径 PCB Hole Diameter [mm]	/

尺寸图

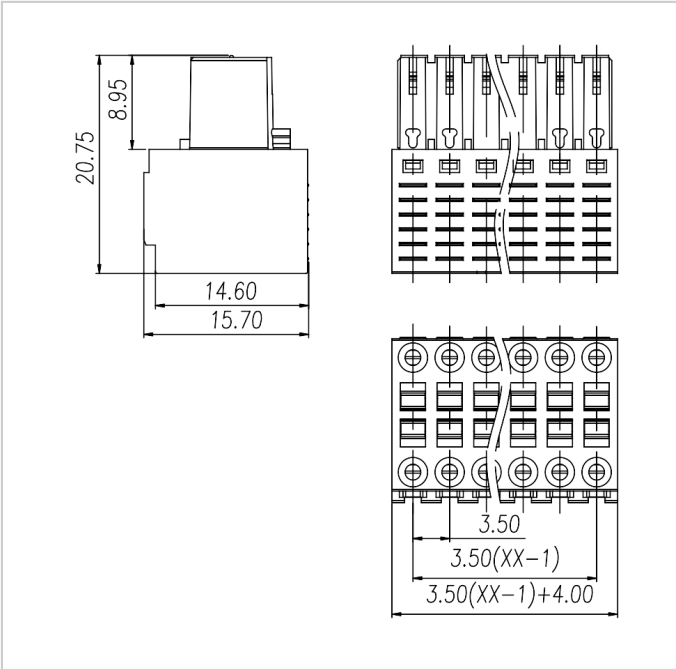


配件


WJ15EDGKSH-3.5

插拔式接线端子


下载日期:2024-05-06




WJ15EDGVHS-3.5




WJ15EDGVHSC-3.5




WJ15EDGRHS-3.5




WJ15EDGRHSC-3.5




WJ15EDGVHS-THR-3.5



WJ15EDGVHSC-THR-3.5



WJ15EDGRHSC-THR-3.5



WJ15EDGRHS-THR-3.5