




电路图：



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术参数-UL ( 1059 )

|                          |            |
|--------------------------|------------|
| 耐电压 Withstanding Voltage | 2200V/1Min |
| 接线范围 Wire Range          | 20-8AWG    |

技术参数-IEC(60947-7-2)

|                                  |     |
|----------------------------------|-----|
| 过电压类别 Overvoltage Category       | III |
| 污染等级 Contamination Class         | 3   |
| 额定冲击电压 Impulse withstand voltage | 8KV |

导线截面积 Conductor cross section

|                                |                       |
|--------------------------------|-----------------------|
| 单芯 Soild                       | 0.5-10mm <sup>2</sup> |
| 柔性导线 Flexible                  | 0.5-6mm <sup>2</sup>  |
| 柔性导线带冷压头 Flexible with ferrule | 0.5-6mm <sup>2</sup>  |

材料 Material

|                             |              |
|-----------------------------|--------------|
| 绝缘材料 Insulation Material    | PA66         |
| 阻燃等级 Flame relardant rating | UL94V-0      |
| 导体材料 Conductor Material     | Copper alloy |


GUV6-103-PE  
GUV直插式接线端子

下载日期:2024-05-03



|                                     |               |
|-------------------------------------|---------------|
| 导体表面镀层 Plating of conductor surface | Sn plated     |
| 一般参数 Other Data                     |               |
| 长/高/厚 Length/Height/Thickness [mm]  | 74.2/42.3/8.2 |
| 连接点数 Connection Points              | 3             |
| 剥线长度 Stripping Length [mm]          | 10-12         |
| 导轨类型 Type of rail                   | DIN 35        |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]        | /             |
| 工作温度 Operating temperature [°C]     | -40~+105      |


尺寸图

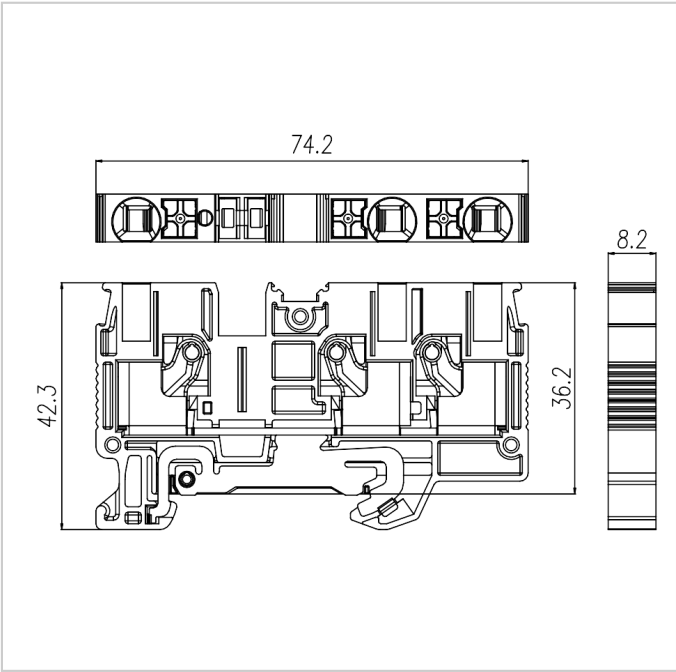


配件



FUVA6-XX



MUV6-10




PUV6-56


## GUV6-103-PE

GUV直插式接线端子

下载日期:2024-05-03




EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D



DUV6-103



DGS1-35x7.5W4.2x12



DGS1-35x7.5W5.2x15



DGS1-35x7.5W