



GUSLKG35-102-PE

GUK 通用组合接线端子

下载日期:2025-06-13



电路图：



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术参数-UL (1059)

接线范围 Wire Range	18-2AWG
-----------------	---------

技术参数-IEC(60947-7-2)

过电压类别 Overvoltage Category	III
污染等级 Contamination Class	3

导线截面积 Conductor cross section

单芯 Soild	10-35mm²
柔性导线 Flexible	10-35mm²
柔性导线带冷压头 Flexible with ferrule	10-35mm²

材料 Material

绝缘材料 Insulation Material	PA66
阻燃等级 Flame relardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Ni plated

一般参数 Other Data

GUSLKG35-102-PE


GUK 通用组合接线端子

下载日期:2025-06-13




长/高/厚 Length/Height/Thickness [mm]	50.0/61.8/15.2
连接点数 Connection Points	2
剥线长度 Stripping Length [mm]	16-17
导轨类型 Type of rail	DIN 35/32
螺丝/扭矩 Screw/Torque(Max)[N.m]	M6/3.2-3.7
工作温度 Operating temperature [°C]	-40~+105


尺寸图

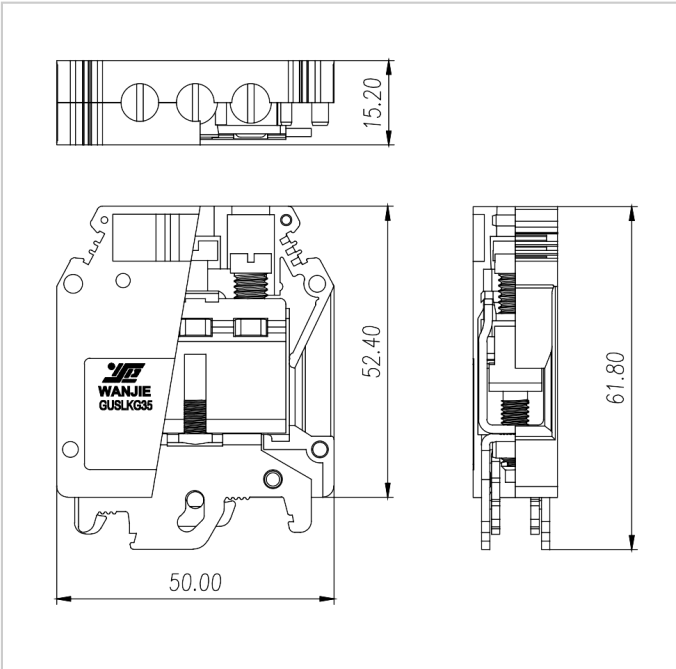

配件




EB-35



EW-35



DGL2-35x7.5A




GUSLKG35-102-PE

GUK 通用组合接线端子

下载日期:2025-06-13



DGL2-35x7.5B




DGL2-35x7.5C



DGL2-35x7.5D



MUV10-10



DGS1-35x7.5W4.2x12

DGS1-35x7.5W5.2x15

DGS1-35x7.5W