

GUV1.5-202-PE

GUV直插式接线端子

下载日期:2024-04-28





目录仅供参考，实际规格依产品工程图为准 版本1.0

技术参数-UL (1059)

接线范围 Wire Range	26-14AWG
-----------------	----------

技术参数-IEC(60947-7-2)

过电压类别 Overvoltage Category	III
污染等级 Contamination Class	3
额定冲击电压 Impulse withstand voltage	6KV

导线截面积 Conductor cross section

单芯 Soild	0.2-1.5mm²
柔性导线 Flexible	0.2-1.5mm²
柔性导线带冷压头 Flexible with ferrule	0.2-1mm²

材料 Material

绝缘材料 Insulation Material	PA66
阻燃等级 Flame relardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated

一般参数 Other Data

GUV1.5-202-PE


GUV直插式接线端子

下载日期:2024-04-28




长/高/厚 Length/Height/Thickness [mm]	65.6/41.1/3.5
剥线长度 Stripping Length [mm]	8-10
认证 Approval	/

尺寸图

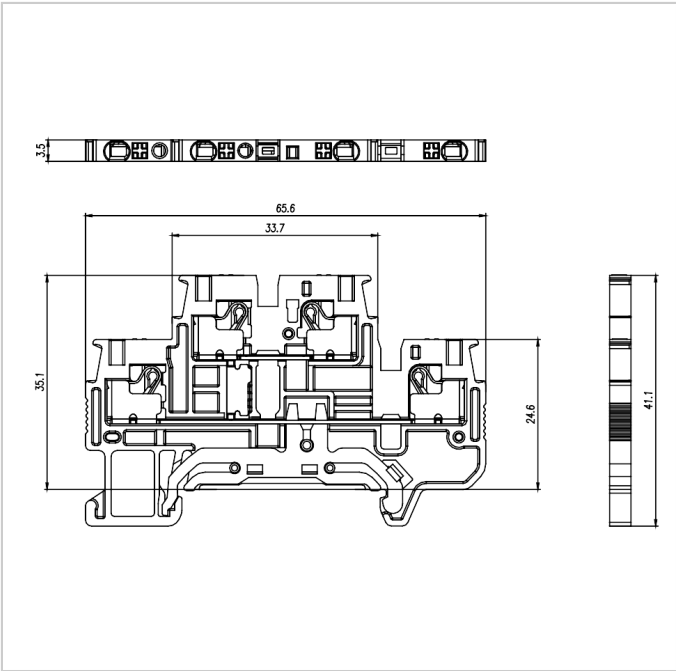


配件




FUVA1.5-XX




DUV1.5-202



PUV1.5-144



EB-35



EW-35

GUV1.5-202-PE

GUV直插式接线端子

下载日期:2024-04-28



DGS1-35x7.5W4.2x12



DGS1-35x7.5W5.2x15




DGS1-35x7.5W



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D